


成品製造管制圖
 DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質
 Non-use Warranty for Level 1
 Prohibited Substances in Product.

Pich 4.2mm
 間距 (.165")

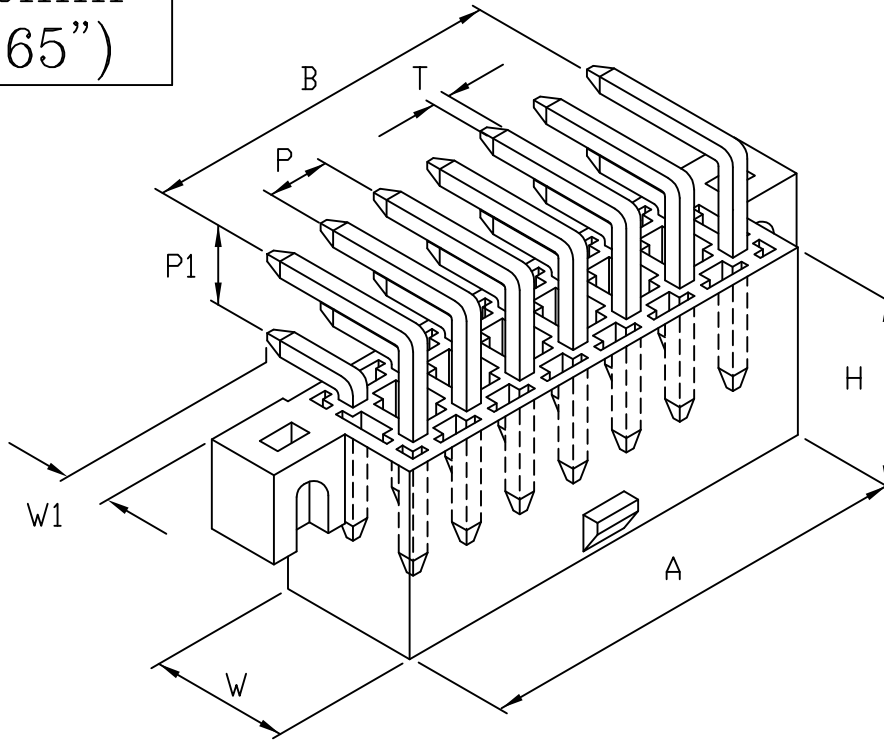

產品編號 Part No: JM2416-R
 品名 Product: 塑膠公座-DIP CONNECTOR-DIP
 材質 Material: Housing: NYLON 94V-2
 Contact Pin: Brass, Tin plated.
 配合端子 Suitable Terminal: J2416BS
 配合塑膠 Suitable housing: JP2416
 額定電壓/電流 Current Rating:
 AC/DC250V 5A(18~24AWG#)
 絕緣阻抗 INS. Resistance: 1000M Ω Min.
 耐電壓 Withstand Voltage: 1000V AC/1minute.
 適用溫度 Operation Temp: -25°C~+85°C
 顏色 Colour: 本色 (Natural)

DIMENSION:(MM)

T: 1.14 ± 0.03
 P: 4.2 ± 0.1
 P1: 5.5 ± 0.2
 W: 9.6 ± 0.3
 W1: 3.4 ± 0.3
 H: 12.8 ± 0.3

PIN	A±0.3	B±0.2
2x1R	5.4	-
2x2R	9.6	4.2
2x3R	13.8	8.4
2x4R	18.0	12.6
2x5R	22.2	16.8
2x6R	26.4	21.0
2x7R	30.6	25.2
2x8R	34.8	29.4
2x9R	39.0	33.6
2x10R	43.2	37.8
2x11R	47.4	42.0
2x12R	51.6	46.2

* 本成品圖僅供參考,若需做為承認用請聯絡就近業務員確認
 (The drawing is for reference only,
 please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan
 總公司: 高雄, 台灣
 TEL: 886-7-6223787
 FAX: 886-7-6210385
 E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan
 台北營業所
 TEL: 886-2-26940195-7
 FAX: 886-2-26940738
 E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan
 外銷業務部
 TEL: 886-7-6223787
 FAX: 886-7-6210385
 E-mail: jmt6318@yahoo.com.tw