



成品製造管制圖

DRAWING OF FINISHED PRODUCTS

|           |                    |
|-----------|--------------------|
| Type/Pich | 2.0 $\phi$ (<244") |
| 形式 / 間距   | 6.2mm              |

禁止使用1級環境管理物質  
 Non-use Warranty for Level 1  
 Prohibited Substances in Product.

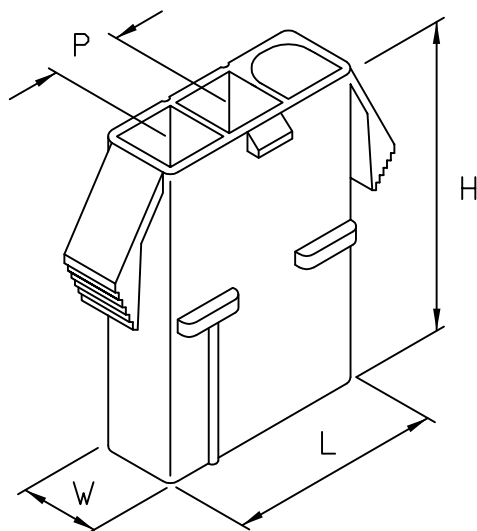

RECOMMENDED PANEL THICKNESS 1.52 MAX

產品編號 Part No: JP2020-3

品名 Product: 塑膠母座 - HOUSING

材質 Material: Housing: NYLON66 UL94V-2

配合端子 Suitable Terminal: J2020/20201BS

配合塑膠 Suitable housing: JP2120-3

額定電壓/電流 Current Rating:

AC/DC250V 8A(18~24AWG#)

絕緣阻抗 INS. Resistance: 1000M  $\Omega$  Min.

耐電壓 Withstand Voltage: 1000V AC/1minute.

適用溫度 Operation Temp: -25°C~+85°C

顏色 Colour: 本色 (Natural)

DIMENSION:(MM)

P: 6.2  $\pm$  0.1

L: 20.0  $\pm$  0.2

W: 7.5  $\pm$  0.2

H: 27.0  $\pm$  0.3

\* 本成品圖僅供參考, 若需做為承認用請聯絡就近業務員確認

(The drawing is for reference only,

please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan

總公司: 高雄, 台灣

TEL: 886-7-6223787

FAX: 886-7-6210385

E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan

台北營業所

TEL: 886-2-26940195-7

FAX: 886-2-26940738

E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan

外銷業務部

TEL: 886-7-6223787

FAX: 886-7-6210385

E-mail: jmt6318@yahoo.com.tw