
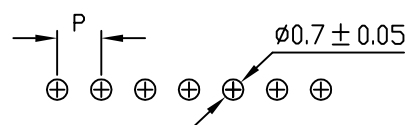


成品製造管制圖

DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質
 Non-use Warranty for Level 1
 Prohibited Substances in Product.

Pich 1.5mm
 間距 (.059")

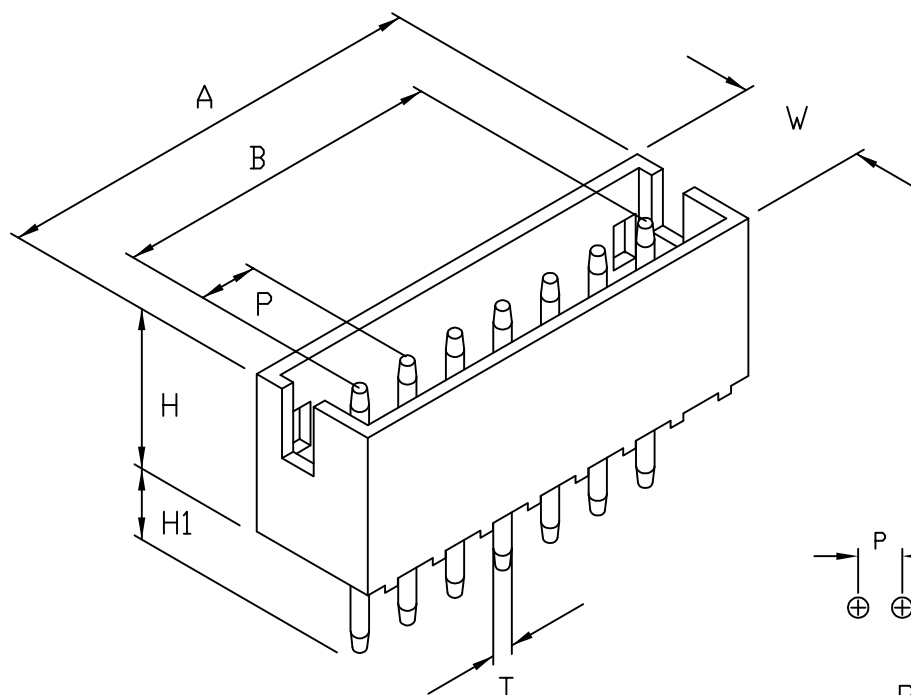

PCB LAYOUT

產品編號 Part No: JM24150

品名 Product: 塑膠公座 - DIP CONNECTOR - DIP

材質 Material: Housing: NYLON 94V-0

Contact Pin: Brass, Tin plated.

配合端子 Suitable Terminal: J24150PS

配合塑膠 Suitable housing: JP24150

額定電壓/電流 Current Rating:

AC/DC50V 1A(28~32AWG#)

絕緣阻抗 INS. Resistance: 500M Ω Min.

耐電壓 Withstand Voltage: 500V AC/1minute.

適用溫度 Operation Temp: -25°C ~ +85°C

顏色 Colour: 本色 (Natural)

DIMENSION:(MM)

P:1.5 $\pm$ 0.1

W:3.5 $\pm$ 0.2

H:4.5 $\pm$ 0.2

H1:2.8 $\pm$ 0.2

T: ϕ 0.5 $\pm$ 0.03

PIN	A $\pm$ 0.3	B $\pm$ 0.2
2	4.5	1.5
3	6.0	3.0
4	7.5	4.5
5	9.0	6.0
6	10.5	7.5
7	12.0	9.0
8	13.5	10.5
9	15.0	12.0
10	16.5	13.5
11	18.0	15.0
12	19.5	16.5

* 本成品圖僅供參考,若需做為承認用請聯絡就近業務員確認

(The drawing is for reference only,
 please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan

總公司: 高雄, 台灣

TEL: 886-7-6223787

FAX: 886-7-6210385

E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan

台北營業所

TEL: 886-2-26940195-7

FAX: 886-2-26940738

E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan

外銷業務部

TEL: 886-7-6223787

FAX: 886-7-6210385

E-mail: jmt6318@yahoo.com.tw