


成品製造管制圖  
 DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質  
 Non-use Warranty for Level 1  
 Prohibited Substances in Product.

Pich 2.5mm  
 間距 (.098")

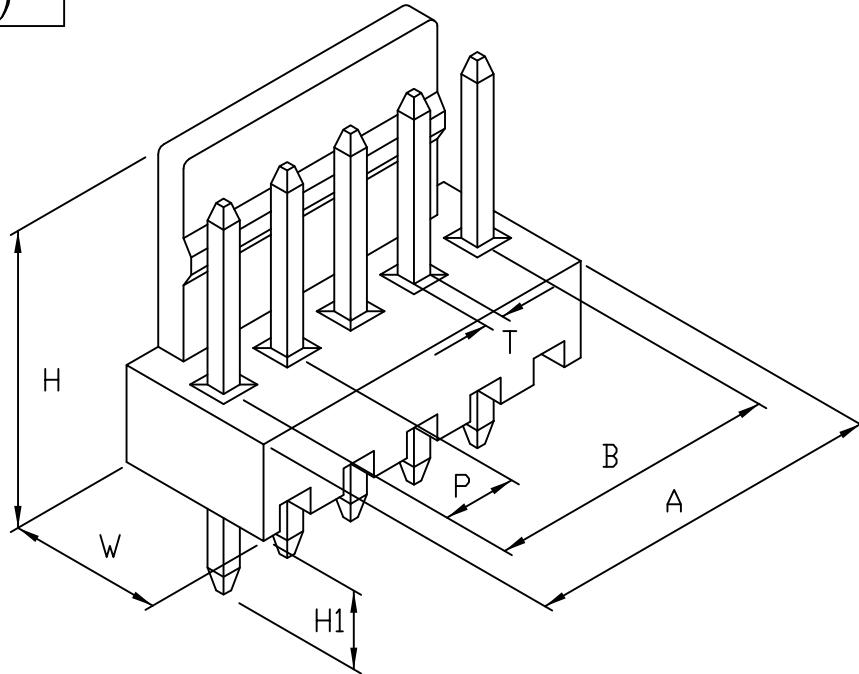

產品編號 Part No: JM2418  
 品名 Product: 塑膠公座 - DIP CONNECTOR - DIP  
 材質 Material: Housing: NYLON 94V-2  
 Contact Pin: Brass, Tin plated.  
 配合端子 Suitable Terminal: J2418  
 配合塑膠 Suitable housing: JP2418  
 額定電壓/電流 Current Rating:  
 AC/DC250V 2A(22~28AWG#)  
 絕緣阻抗 INS. Resistance: 1000MΩ Min.  
 耐電壓 Withstand Voltage: 1000V AC/1minute.  
 適用溫度 Operation Temp: -25°C~+85°C  
 顏色 Colour: 本色 (Natural)

DIMENSION:(MM)

P: 2.5 ± 0.1  
 W: 4.5 ± 0.3  
 H: 8.7 ± 0.3  
 H1: 3.2 ± 0.3  
 T: 0.64 ± 0.1

PIN	A±0.3	B±0.2
2	5.0	2.5
3	7.5	5.0
4	10.0	7.5
5	12.5	10.0
6	15.0	12.5
7	17.5	15.0
8	20.0	17.5
9	22.5	20.0
10	25.0	22.5
11	27.5	25.0
12	30.0	27.5

\* 本成品圖僅供參考, 若需做為承認用請聯絡就近業務員確認  
 (The drawing is for reference only, please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan  
 總公司: 高雄, 台灣  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan  
 台北營業所  
 TEL: 886-2-26940195-7  
 FAX: 886-2-26940738  
 E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan  
 外銷業務部  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6318@yahoo.com.tw