


成品製造管制圖  
 DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質  
 Non-use Warranty for Level 1  
 Prohibited Substances in Product.

Pich 3.0mm  
 間距 (.118")

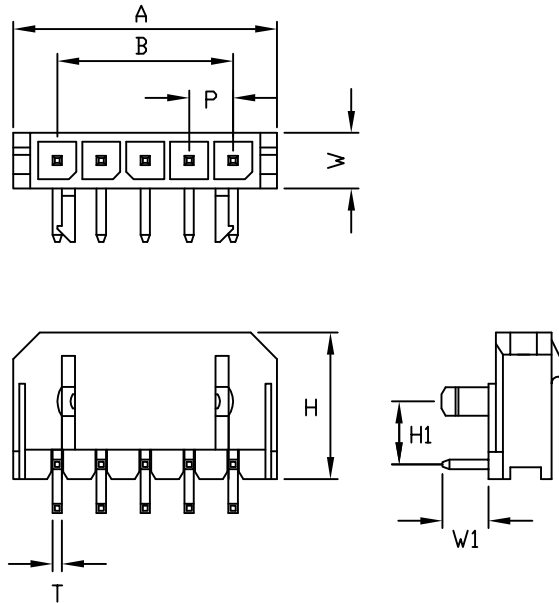

產品編號 Part No: JM2316-1xR1  
 品名 Product: 塑膠公座-DIP CONNECTOR-DIP  
 材質 Material: Housing: NYLON 94V-0  
 Contact Pin: Brass, Tin plated.  
 配合端子 Suitable Terminal: J2316PS  
 配合塑膠 Suitable housing: JP2316-1x  
 額定電壓/電流 Current Rating:  
 AC/DC250V 5A(20~24AWG#)  
 絕緣阻抗 INS. Resistance: 1000MΩ Min.  
 耐電壓 Withstand Voltage: 1500V AC/1minute.  
 適用溫度 Operation Temp: -25°C~+85°C  
 顏色 Colour: 黑色 (BLACK)

DIMENSION:(MM)  
 P: 3.0 ± 0.1  
 W: 3.9 ± 0.2  
 W1: 3.2 ± 0.3  
 H: 9.9 ± 0.2  
 H1: 4.3 ± 0.3  
 T: □ 0.64 ± 0.03

PIN	A±0.3	B±0.2
1x2R1	9.6	3.0
1x3R1	12.6	6.0
1x4R1	15.6	9.0
1x5R1	18.6	12.0
1x6R1	21.6	15.0
1x7R1	24.6	18.0
1x8R1	27.6	21.0
1x9R1	30.6	24.0
1x10R1	33.6	27.0
1x11R1	36.6	30.0
1x12R1	39.6	33.0

\* 本成品圖僅供參考,若需做為承認用請聯絡就近業務員確認  
 (The drawing is for reference only,  
 please contact the sales division nearby for final confirmation if it's for approval purpose.)

H/Q: Kaohsiung, Taiwan  
 總公司: 高雄, 台灣  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6317@jmt.com.tw

Taipei Branch, Taiwan  
 台北營業所  
 TEL: 886-2-26940195-7  
 FAX: 886-2-26940738  
 E-mail: taipei.jmt@msa.hinet.net

Overseas, Taiwan  
 外銷業務部  
 TEL: 886-7-6223787  
 FAX: 886-7-6210385  
 E-mail: jmt6318@yahoo.com.tw